

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 34 TOWNSHIP 15 RANGE 4

DATE: 10-17-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison set per ties/GPS


METHOD OF ESTABLISHMENT: County: 5-12-01

IN. S.P.C. E ZONE NAD '83

NAME: 15043401

N: 495309.7299(m)

E: 64333.6778(m)

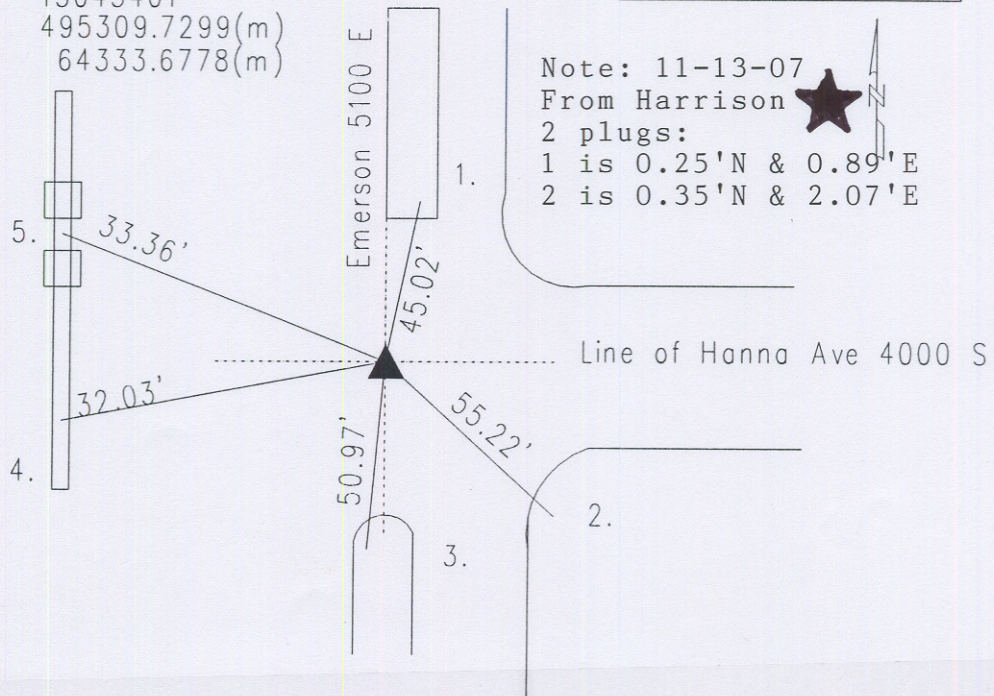

15043401 NW corner

CORNER HISTORY: Corner originally set as a post in 1821 by John Hendricks with witness: 24" beech S 52 W 30 links; 8" ash N 44 E 26 links per Marion County Atlas pg.10. Survey dated 3-25-1851 by D. B. Hosbrook called our distances to the corner per Franklin Township Legal Survey Book pg. 3. Survey dated 3-1851 by D.B. Hosbrook called witnesses: 22" beech S 69 E 51 links; 8" walnut S 70 1/2 W 59 links per Franklin Township Legal Survey Book pg. 4. Survey dated 8-29-1876 by H. B. Fatout called found rock already set, no witness. Reference dated 3-13-1961 by Monroe called #41 date nail. Reference dated 2-20-1974 by McLand called a PK nail. See Note: two brass plugs are located to the Northeast of this corner. One is 0.30'N and 2.09'E of the corner and marks the P.O.T. at STA 113+93.00 "A" according to sheet 9 on Project #ST-40-001A. The other is 0.28'N and 0.86'E of the corner and is located 1.2' left of STA 113+93.00 "A". This second disc was to mark the section corner by was apparently mis-located on the highway plans. Reference dated 5-10-77 by Wilcoxon called cut 'x'. Reference dated 10-20-88 by Jacobs called cut 'x'. Reference dated 7-26-96 by Kiste called cut 'x'. Reference dated 5-12-01 by Kiste called cut 'x'. Reference dated 10-17-07 by Wilcoxon called Harrison was set where the cut 'x' was recovered per coordinates. Reference dated 11-13-07 by Wilcoxon noted: 2 plugs: 0.25'N & 0.89'E and 0.35'N & 2.07'E from Harrison.

REF.	DISTANCE	DESCRIPTION
1.	45.02'	Cut 'x' S-end of concrete median
2.	55.22'	Cut 'x' in curb N of grade inlet
3.	50.97'	Cut 'x' in curb of grass median
4.	32.03'	Cut 'x' in curb
5.	33.36'	Cut 'x' in curb